

Thin Plate Pure Lead





PLH100 (12V100Ah)

PLH SERIES
LONG STANDBY LIFE

Specification

Nominal Voltage	12V	
Rated Capacity (Ah)	100Ah	(C ₁₀ , 1.80V/cell, 25°C)
	100Ah	(C ₈ , 1.75V/cell, 25°C)
Dimension	Length	341.5±2mm (13.44 inches)
	Width	175±2mm (6.89 inches)
	Height	213±2mm (8.39 inches)
	Total Height (with Terminal)	215±2mm (8.46 inches)
Weight	31.2Kg (68.8 lbs)	
Terminal	M8	
Container Material	PC-ABS flame retardant jar and cover to UL94V-0	
Max. Discharge Current	1250A (5s)	
Internal Resistance	Approx 3.5mΩ(Fully charged)	
Operating Temp. Range	Discharge : -40°C ~ 65°C (-40°F ~ 149°F)	
	Charge : 0°C ~ 40°C (32°F ~ 104°F)	
	Storage : -20°C ~ 40°C (-4°F ~ 104°F)	
Capacity affected by Temperature	40°C (104°F)	103%
	25°C (77°F)	100%
	0°C (32°F)	86%

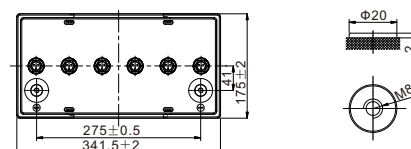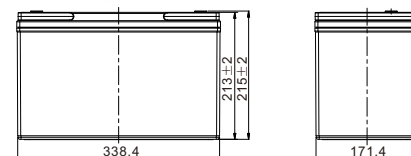

Unit: mm

Storage

PLH series batteries can be stored up to 24 months at 25°C(77°F), For higher temperatures the time interval will be shorter.

Battery needs to be given a freshening charge when the OCV approach 2.10V/cell or when the maximum storage time is reached, whichever occurs first.



Constant Current Discharge (Amperes) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	194.1	160.4	137.7	106.8	79.3	61.7	34.3	24.5	19.7	16.60	11.5	9.80	5.19
1.80V/cell	216.6	176.2	147.6	111.9	82.2	64.0	35.4	25.4	20.3	17.0	11.8	10.0	5.30
1.75V/cell	229.7	184.3	153.9	115.5	84.5	65.7	36.2	25.9	20.8	17.4	12.0	10.1	5.38
1.70V/cell	241.9	192.0	158.6	118.9	86.3	67.0	36.9	26.4	21.1	17.7	12.1	10.3	5.42
1.67V/cell	262.2	204.1	166.2	122.0	87.6	68.0	37.5	26.9	21.4	18.0	12.3	10.4	5.46
1.60V/cell	276.5	212.8	172.4	125.4	89.3	69.2	38.3	27.3	21.8	18.3	12.5	10.5	5.51

Constant Power Discharge (Watts/cell) at 25 °C (77°F)

F.V/Time	10min	15min	20min	30min	45min	1h	2h	3h	4h	5h	8h	10h	20h
1.85V/cell	368.3	306.8	265.0	207.9	156.7	122.3	68.5	49.1	39.6	33.5	23.4	19.9	10.6
1.80V/cell	404.4	332.6	281.2	216.4	161.6	126.1	70.3	50.7	40.7	34.2	23.8	20.3	10.8
1.75V/cell	424.5	344.6	290.8	221.6	164.8	128.8	71.6	51.5	41.5	34.9	24.2	20.5	10.9
1.70V/cell	440.2	354.7	296.8	226.2	167.3	130.6	72.6	52.3	42.0	35.4	24.4	20.7	11.0
1.67V/cell	472.5	373.2	308.4	231.1	169.2	132.1	73.6	53.0	42.5	35.9	24.7	20.9	11.1
1.60V/cell	484.9	381.0	314.7	234.6	170.6	133.2	74.4	53.5	42.9	36.2	24.9	21.0	11.2


Thin Plate Pure Lead




Features & Benefits

- 20 years design life(25°C)
- Low internal resistance
- Fast Charging Acceptance
- Premium ABS+ jar & covers
- IATA Approved for Air Freight
- Heat sealed plastic container
- UL Recognized, IEC Certified
- Automated COS & TTP welding
- Flame Retardant to UL94V-0
- Long Shelf Life up to 2 years @25°C(77°F)
- High-rate performance, high energy density
- Virgin pure lead plates / copper alloy terminal inserts
- Excellent high rate discharge capability for emergency backup power supply.
- High quality AGM separators minimize electrical resistance to allow high current discharging properties.
- Outstanding high rate charge capability with Thin Plate Pure Lead technology


Discharging Characteristics

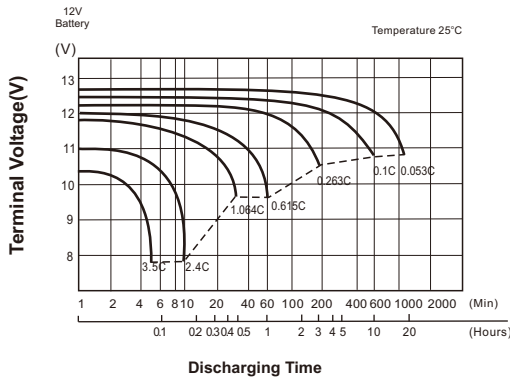


Charging Characteristics

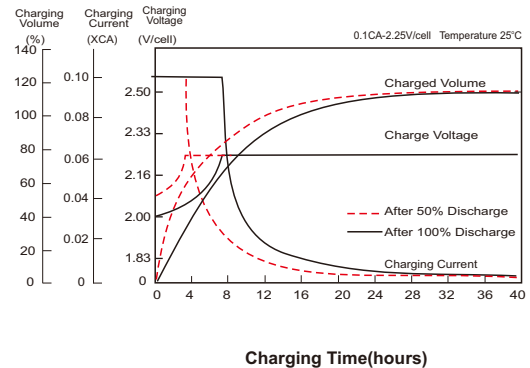

Effect of Temperature on Discharging Time

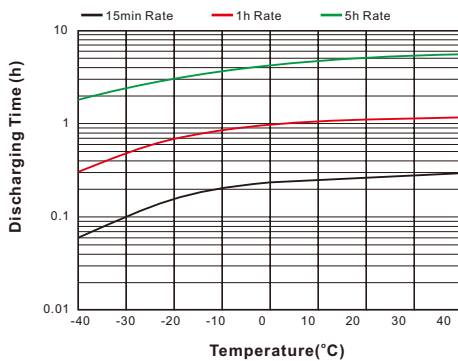

Float Life

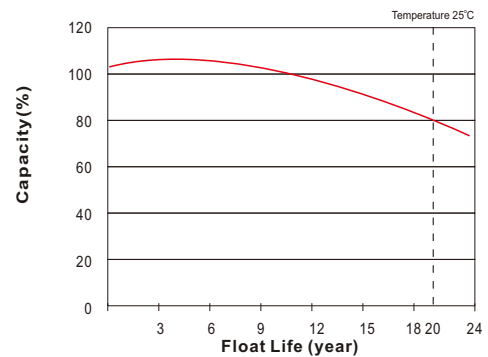

Sales Offices Worldwide

China sales office

5th Floor, Xinbaohui Bldg., Nanhai Blvd.,
Nanshan, Shenzhen, China. 518052
Tel: +86-755-86036060 (100 lines)
Fax: +86-755-26067269
E-mail: export@leoch.com

HongKong sales office

Workshop C, 33/F, TML Tower, No. 3 Hoi Shing Road,
Tsuen Wan, New Territories, Hong Kong
Tel: +852 35786666
Fax: +44 1452 690125
E-mail: sales.hk@leoch.com

Singapore sales office

No. 1 Tech Park Crescent,
Singapore 638131
Tel: +65 68636078
Fax: +65 6863 6079
Email: sales.sg@Leoch.com

Australia Sales Office

2/29 Tarlington Place, Smithfield, NSW 2164
Australia
Tel: 02 9756 0950
E-mail: sales.au@leoch.com

North America sales office

19751 Descartes, Unit A,
Foothill Ranch, CA 92610, USA
Tel: 949-588-5853
Fax: 949-588-5966
E-mail: sales@leoch.us

UK sales office

9B Wheatstone Court, Waterwells, Business Park,
Gloucester, GL2-2AQ, UK United Kingdom
Tel: +44(0) 1452 729428 / 1452 729696
Fax: +44 1452 690125
E-mail: Sales.Europe@leoch.com

Europe/MEA Sales Office

1 Deligiorgi St., 121 31 Athens,
Greece
Tel: +30 210 5760318 (2 lines)
E-mail: support_EMEA@leoch.com

India Sales Office

Shed no. A-53(b), 2nd Stage of Peenya Industrial Area,
Bangalore North Taluk, Bangalore-560058, India
Tel: +91-80-23440018/23440019
Fax: +91-80-23440017
E-mail: indiasales@leoch.com



[Http://www.leoch.com](http://www.leoch.com)
[Http://www.leoch.us](http://www.leoch.us)

© 2017 LEOCH. All rights reserved.
Trademarks and logos are the property of LEOCH and its affiliates unless otherwise noted.
Subject to revisions without prior notice.